


Terminal Strip — TLB series — TLB-300HW

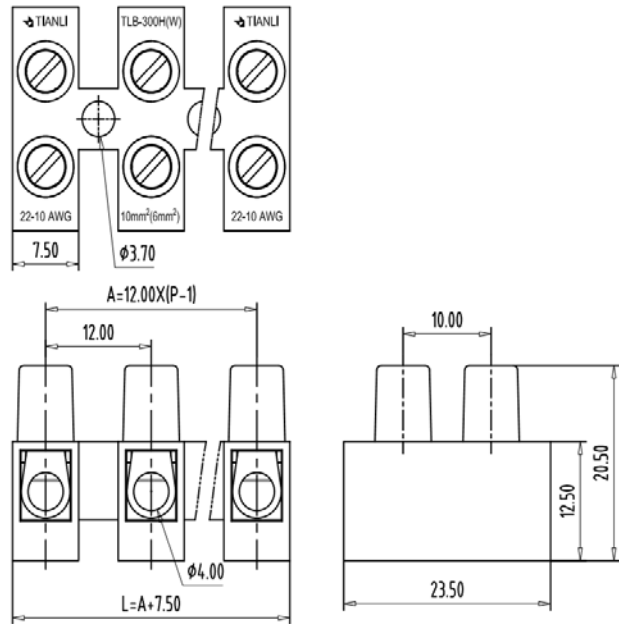


■ 图示(Pic. shown) : TLB-300HW-12P-T01S

|          |  |
|----------|--|
| General. | Terminal Strip Rated : 750V,41A , 6mm <sup>2</sup> |
|          | 12.00mm pitch , 02-12 Pole                         |
|          | Wire-to-Wire Connection                            |
|          | Screw clamp unit: M3.5, 0.8Nm Max                  |

认证 ( Approval ) :

| 技术参数 Technical Data                                      | UL standard                  |                      |      | IEC standard         |  |        |
|--|------------------------------|----------------------|------|----------------------|--|--------|
|  | UL应用组别(UL Application group) | UL Application group |      |                      | IEC过电压别/污染等级(IEC overvoltage category /pollution degree) |        |
| IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | B                            | C                    | D    | III / 3              | III / 2  | II / 2 |
| 额定电压(Rated voltage)                                      | 300V                         | 150V                 | 300V | --                   | 750V   | --     |
| 额定电流(Rated current)                                      | 30A                          | 30A                  | 10A  | --                   | 41A  | --     |
| 额定连接容量(Rated connection capacity)                        | 22-10AWG Sol&Str             |                      |      | 1.5-6mm <sup>2</sup> |  |        |
| 绝缘材料(Insulation Material)                                | PA66 UL94 V-2                |                      |      |                      |  |        |
| 电流承载部件材料和镀层( Material & Plating of Current carrier )     | Copper alloy , Ni plated     |                      |      |                      |  |        |
| 接线弹片材料(Material of Clamp spring )                        | --                           |                      |      |                      |  |        |
| 绝缘电阻(Insulation Resistance)                              | 500MΩ or more at DC500V      |                      |      |                      |  |        |
| 耐电压(1分钟)(Withstanding Voltage/1Min)                      | 3000V                        |                      |      |                      |  |        |
| 额定冲击电压(Rated surge voltage)                              | --                           |                      |      |                      |  |        |
| 接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )        | M3.5 , 0.8Nm Max             |                      |      |                      |  |        |
| 固定螺丝(Mounting Screw) , 扭矩(torque)                        | --                           |                      |      |                      |  |        |
| 剥线长度(Wire stripping length)                              | 8.0-9.0mm                    |                      |      |                      |  |        |
| 使用温度(Operating temperature)                              | -40°C up to +80C             |                      |      |                      |  |        |
| 焊接方式(Soldering recommend)                                | --                           |                      |      |                      |  |        |

■ 订购方式(How to order)

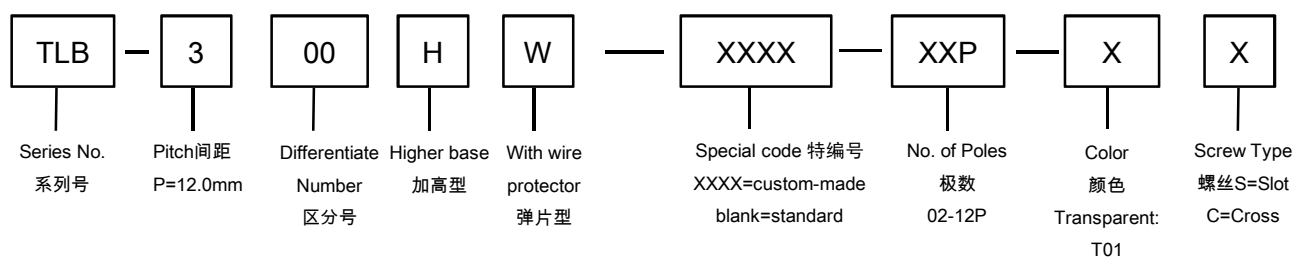

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn  
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号  
ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China