
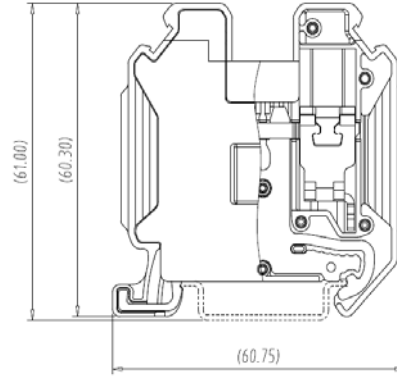



## Rail Mounted Terminal Block — TK series — TK35-PE

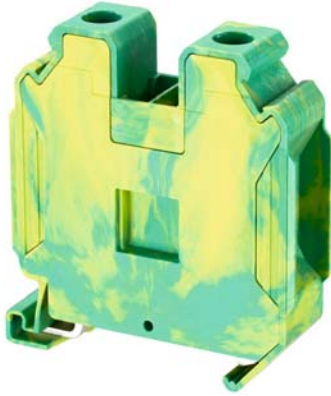


### ■ 图示(Pic. shown) : TK35-PE(S)

General: Rail Mounted terminal block  
Screw clamp unit: M6,3.5N·m  
Mounting type: DIN Rail TH35-7.5

认证 ( Approval ) : 

### ■ 电路图(Circuit diagram)




### ■ 尺寸(Dimensions)

长度(Length)	60.75mm
宽度(Width)	16.00mm
安装高度(Height TH35-7.5)	61.00mm

■ 技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	B	C	E	III / 3	III / 2	II / 2
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)				1000V	--	--
额定电压(Rated voltage)	600V	600V	1000V	--	--	--
额定电流(Rated current)	--	--	--	--	--	--
额定连接容量(Rated connection capacity)	14 ~ 1/0AWG			1.5 ~ 35mm <sup>2</sup> & 50mm <sup>2</sup> (sol)		
刚性导线横截面 ( AWG ) ( Conductor cross section,solid )				14 ~ 1/0		
柔性导线横截面 ( AWG ) ( Conductor cross section,stranded )				14 ~ 1/0		
刚性导线横截面 ( mm <sup>2</sup> ) ( Conductor cross section,rigid )				1.5 ~ 50		
柔性导线横截面 ( mm <sup>2</sup> ) ( Conductor cross section,flexible )				1.5 ~ 35		
具有相同横截面的2根实心导线 ( mm <sup>2</sup> ) ( 2 conductors with cross section,solid )				1.5 ~ 16		
具有相同横截面的2根柔性导线 ( mm <sup>2</sup> ) ( 2 conductors with cross section,flexible )				1.5 ~ 10		
柔性导线横截面, 不带绝缘套管的冷压头 ( mm <sup>2</sup> ) ( Conductor cross section flexible , with ferrule without plastic sleeve )				1.5 ~ 35		
柔性导线横截面, 带绝缘套管的冷压头 ( mm <sup>2</sup> ) ( Conductor cross section flexible , with ferrule with plastic sleeve )				1.5 ~ 35		
2根具有相同横截面的导线, 柔性, 带TWIN套管及塑料套管 ( mm <sup>2</sup> ) ( 2 conductors with the same section flexible with TWIN ferrule and plastic sleeve )				1.5 ~ 16		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )				Copper alloy , Tin plated		
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )				M6, 3.5N·m		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				4250V		
额定冲击电压(Rated surge voltage)				8KV		
剥线长度(Wire stripping length)				14.0~16.0mm		
使用温度(Operating temperature)				-40°C up to +115°C		

## 订购方式(How to order)

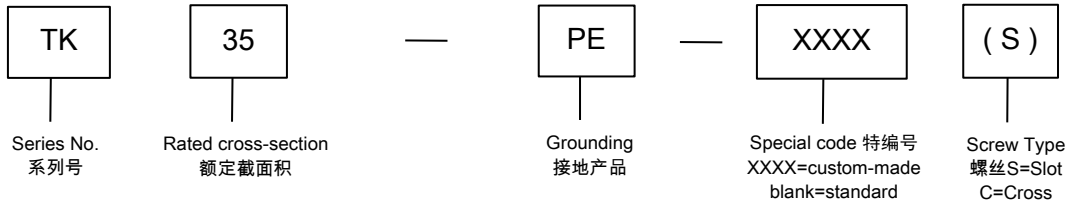

## Rail Terminal Block — TK series — TK35-PE — Accessories

### 安装导轨 DIN Rail



P/N: TH35-7.5-ST

P/N: TH35-7.5-AL

### 桥接件 Plug-in bridge P/N: /

### 终端固定器 End clamp



P/N: ETNS01



P/N: ETNS03

### 标示牌 Marking label P/N: MARK16DB-M



P/N: ETNS02