

FILE: TL\205\TL205P-XXP-X

REV	E.C.N NO.	CONTENT	CHK	DATE
V3.0	S1508001	Relax tolerance	YHZ	2015.08.21

NOTES:


1. UL:

Rating:300V,10A;
Insulation Withstands Voltage:AC1600V/MIN;
Using Temperature Range:-40℃~+105℃;

2. IEC:

Rating:320V,19A;
Rate Impulse Voltage:4000V;
Insulation Resistance:500MΩ or more at DC500V;
Contact Resistance: ≤5mΩ
Material Group:IIIa;
Pollution Degree:2;
Overvoltage Category:III;
Using Temperature Range:-40℃~+120℃;

3. RoHS compliance;

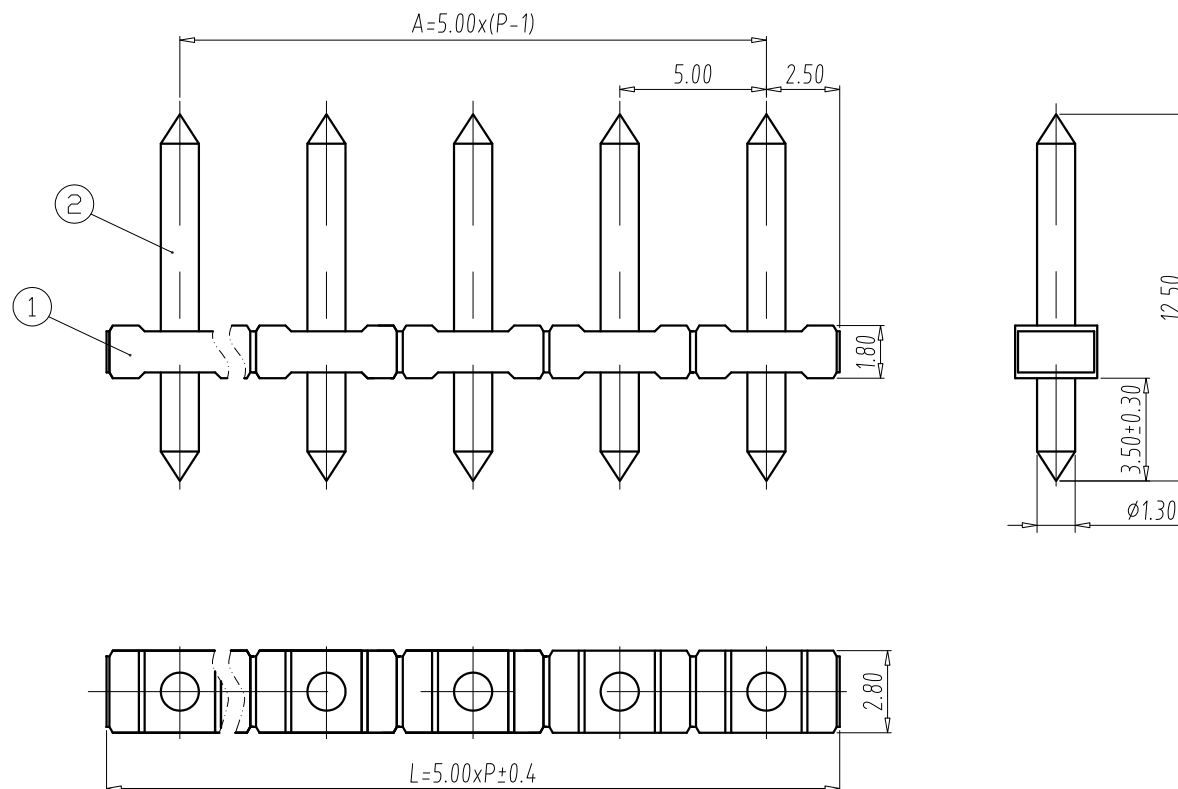

DIM	P	2	3	4	5	6	7	8	9	10	11	12													
		L	10	15	20	25	30	35	40	45	50	55	60												
DIM	P	A	5	10	15	20	25	30	35	40	45	50	55												
		L	13	14	15	16	17	18	19	20	21	22	23	24											
DIM	P	A	65	70	75	80	85	90	95	100	105	110	115	120											
		L	60	65	70	75	80	85	90	95	100	105	110	115											
Total Pitch Tolerances in mm													Nominal dimension range in mm												
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 320 to 360	over 360 to 400	over 400 to 450	over 450 to 500	over 500 to 560	over 560 to 630	over 630 to 710	over 710 to 800	over 800 to 900	over 900 to 1000	over 1000 to 1120	over 1120 to 1250	over 1250 to 1400	over 1400 to 1600	over 1600 to 1800	over 1800 to 2000	
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20								

2	SOLDER PIN	P	Copper Alloy	Tin Plated	
1	HOUSING	1	PA66	UL94 V-0	
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE	
DATE	2005.04.12	UNITS	MM	SHEET/OF	1/1
DATE		SCALE	3.5 : 1	A4	
DATE		NAME	TL205P-XXP-X		
TIANLI MACHINERY(NINGBO)CO.,LTD.		DWGNO.	TLDW-TL205PXXPX		



TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.