



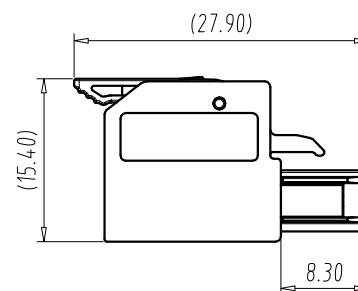
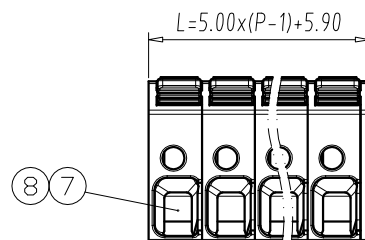


FILE: TLP\219\TLPS-219V-XXP(X)

REV	E.C.N NO.	CONTENT	CHK	DATE
V0.1		Update the drawing	GJJ	2024.05.30

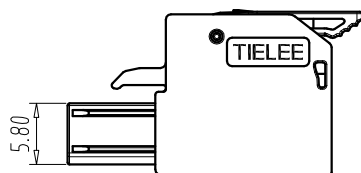

02P

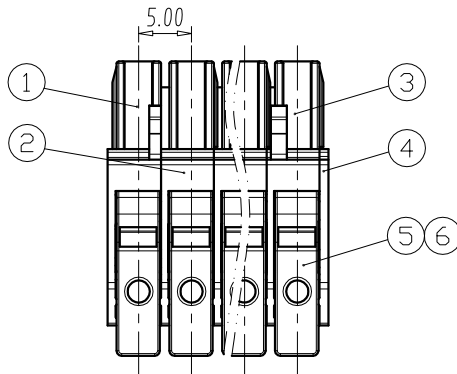

DIM	P	2	3	4	5	6	7	8	9	10	11	12		
	L	10.90	15.90	20.90	25.90	30.90	35.90	40.90	45.90	50.90	55.90	60.90		
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24	
	L	65.90	70.90	75.90	80.90	85.90	90.90	95.90	100.90	105.90	110.90	115.90	120.90	

A	Total Pitch Tolerances in mm								Nominal dimension range in mm															
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 350	over 400	over 450	over 500	over 550	over 600	over 650	over 700	over 750	over 800	over 850	over 900	over 950	over 1000
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 350	to 400	to 450	to 500	to 550	to 600	to 650	to 700	to 750	to 800	to 850	to 900	to 950	to 1000	
	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20						

NOTES:

1. UL:

Rating:300V, 16A;
Insulation Withstands Voltage:AC1600V/1MIN;
Suitable Electric Wire:26AWG~12AWG

2. IEC:

Rating:630V, 16A;
Rate Impulse Voltage:4000V;
Insulation Resistance:500MΩ or more at DC500V;
Contact Resistance: ≤5mΩ
Material Group: I ;
Pollution Degree:2;
Overvoltage Category: II ;
Suitable Electric Wire:0.2mm²~2.5mm²

3.Using Temperature Range:-40℃~+115℃;

4.Strip length:10.0~12.0mm

5.RoHS compliance;

8	CLAMP	P	COPPER ALLOY	Tin Plated
7	SPRING	P	STAINLESS	/
6	Rotating bracket	P	PA66	UL94V-0
5	LEVER	P	PA66	UL94V-0
4	COVER	1	PA66	UL94V-0
3	HOUSING3	1(P≥3)	UL94V-0	UL94 V-0
2	HOUSING2	1(P=2) P-2	PA66	UL94V-0
1	HOUSING1	1	PA66	UL94V-0
ITEM	NAME OF PART	Q*TY	MATERIAL	NOTE

DWG.	ZY	DATE	2023.07.27	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	15 : 1	A4	
APP.		DATE		NAME TLPS-219V-XXP(X)			
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.				DWGNO	TLDW-TLPS219VXXPX		