
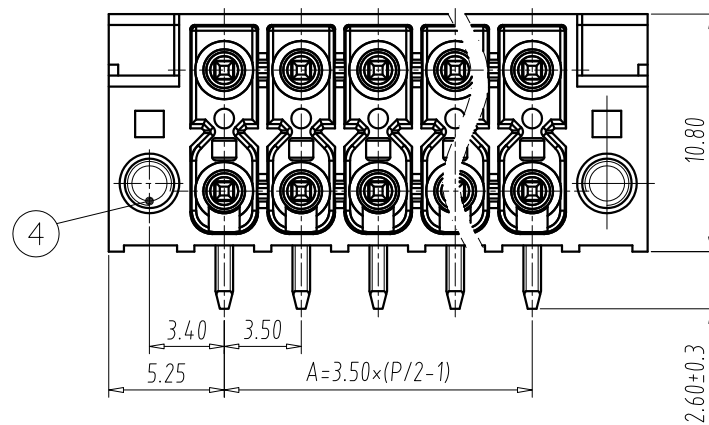
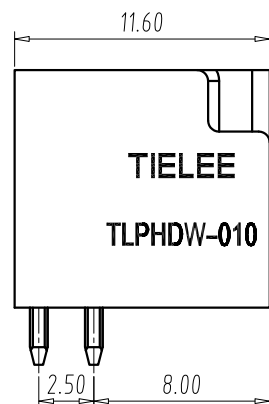
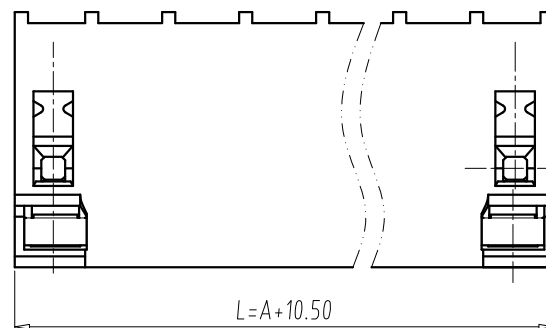


FILE: TLP\010\TLPHDW-010R-XXP-X

REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	SK	2021.07.22

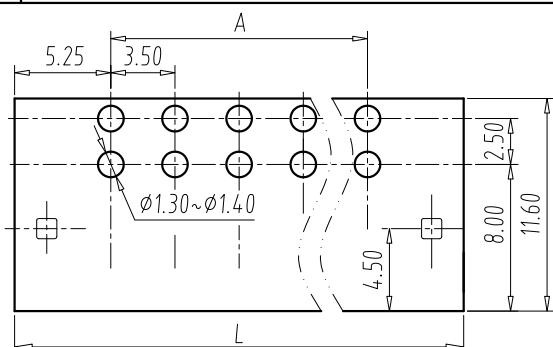

NOTES:

1. UL:

Rating:300V, 8A;

Insulation Withstands Voltage:AC1600V/MIN;

Using Temperature Range:-40℃~+115℃;

2. IEC:

Rating:160V, 10A;

Rate Impulse Voltage:2500V;

Insulation Resistance:500MΩ or more at DC500V;

Contact Resistance: ≤5mΩ


Material Group:IIIa;

Pollution Degree:2;

Overvoltage Category:III;

Using Temperature Range:-40℃~+120℃;

3. RoHS compliance;

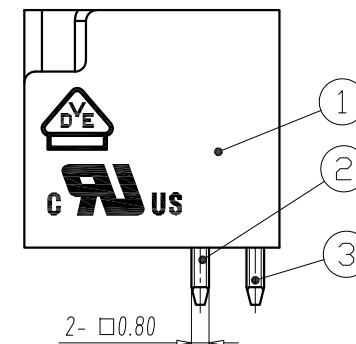

DIM	P	4	6	8	10	12	14	16	18	20	22	24	
	L	14	17.5	21	24.5	28	31.5	35	38.5	42	45.5	49	
DIM	P	26	28	30	32	34	36	38	40	42	44	46	48
	L	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	91

Total Pitch Tolerances in mm										Nominal dimension range in mm									
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 300	over 300 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 300	over 300 to 320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±1.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.00	±1.20

4	NUT	2	COPPER ALLOY	M2
3	LONG SOLDER PIN	P/2	COPPER ALLOY	Tin Plated
2	SHORT SOLDER PIN	P/2	COPPER ALLOY	Tin Plated
1	HOUSING	1	PA66	UL94 V-0

DWG.	SK	DATE	2021.04.06	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	3 : 1	A4	
APP.		DATE		NAME	TLPHDW-010R-XXP-X		
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.					DWGNO.	TLDW-TLPHDW010RXXPX	

TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.