

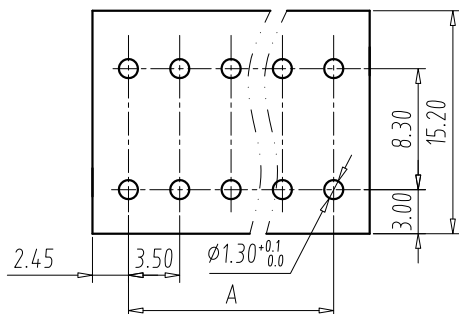
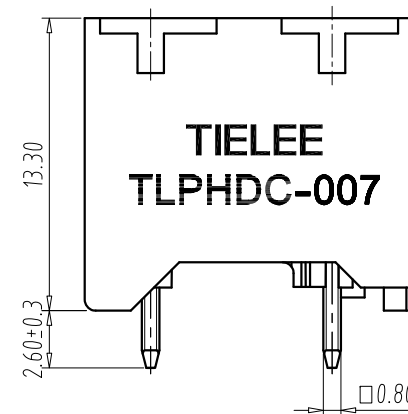
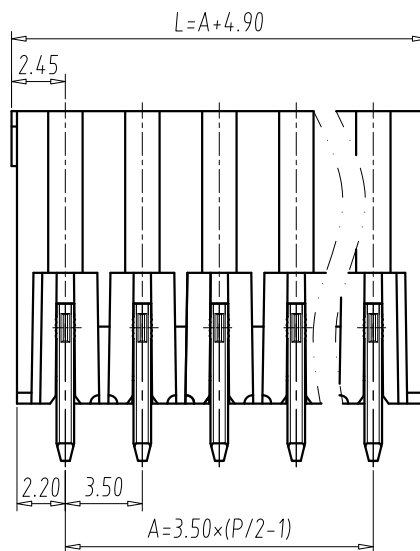


FILE: TLP\007\TLPHDC-007V-XXP-X

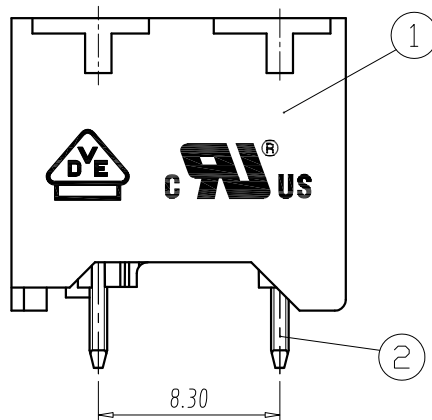

PCB LAYOUT
S=1.5:1

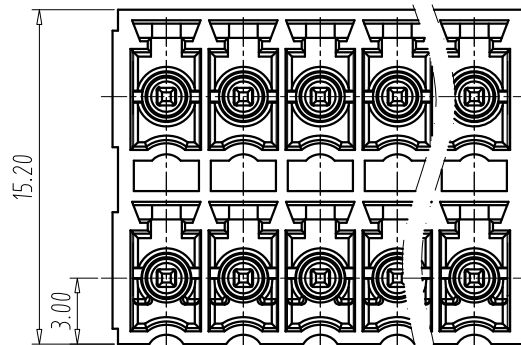

REV	E.C.N NO.	CONTENT	CHK	DATE
V2.0	S2012013	Change logo	SK	2021.05.03

NOTES:

1. UL:

Rating:300V, 8A;
Insulation Withstands Voltage:AC1600V/MIN;
Using Temperature Range:-40℃~+115℃;

2. IEC:

Rating:160V, 10A;
Rate Impulse Voltage:2500V;
Insulation Resistance:500MΩ or more at DC500V;
Contact Resistance: ≤5mΩ
Material Group:IIIa;
Pollution Degree:3;
Overvoltage Category:III;
Using Temperature Range:-40℃~+120℃;

3. RoHS compliance;

DIM	P	04	06	08	10	12	14	16	18	20	22	24
	L	8.4	11.9	15.4	18.9	22.4	25.9	29.4	32.9	36.4	39.9	43.4
A		3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5
DIM	P	26	28	30	32	34	36	38	40	42	44	46
	L	46.9	50.4	53.9	57.4	60.9	64.4	67.9	71.4	74.9	78.4	81.9
A		42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77

Total Pitch Tolerances in mm										Nominal dimension range in mm									
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 320
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±1.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.00	±1.20

2	SOLDER PIN	P	COPPER ALLOY	Tin Plated		
1	HOUSING	1	PA66	UL94 V-0		
ITEM	NAME OF PART	Q'TY	MATERIAL		NOTE	
DATE	2020.11.23	UNITS	MM	SHEET/OF		1/1
DATE		SCALE	3 : 1	A4		
DATE		NAME	TLPHDC-007V-XXP-X			
TIANLI						
MACHINERY(NINGBO)CO.,LTD.		DWGNO.	TLDW-TLPHDC007VXXPX			

DWG.
CHK.
APP.

SK
DATE
DATE

DATE
DATE
DATE

UNITS
SCALE
NAME

MM
3:1
TLPHDC-007V-XXP-X

SHEET/OF
A4
TLPHDC-007V-XXP-X

1/1
TLPHDC-007V-XXP-X

TLPHDC-007V-XXP-X

TLPHDC-007V-XXP-X



TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.

NAME
DWGNO.

TLPHDC-007V-XXP-X
TLDW-TLPHDC007VXXPX