
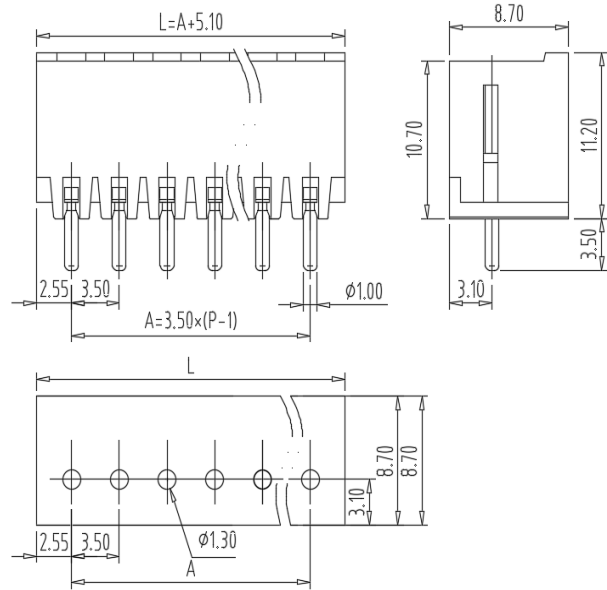


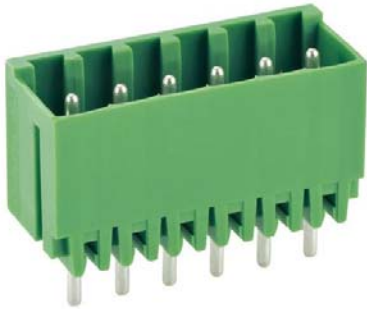

■ 图示(Pic. shown) : TLPHC-003V-06P-G12

General.

PCB Connector Rated : 300V,10A

Single row , 3.50mm pitch , 02-24 Pole

Orientation:90°(plug-in to board)

认证 (Approval) :



■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	--	--
额定电流(Rated current)	10A	--	10A	--	--	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)		PA66 UL94 V-0				
绝缘材料组别(Material group)		I				
电流承载部件材料和镀层(Material & Plating of Current carrier)		Copper alloy , Tin plated				
接线弹片材料(Material of Clamp spring)		--				
耐电压(1分钟)(Withstanding Voltage/1Min)		1600V				
额定冲击电压(Rated surge voltage)		--				
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)		--				
固定螺丝(Mounting Screw) , 扭矩(torque)		--				
剥线长度(Wire stripping length)		--				
使用温度(Operating temperature)		-40℃ up to +115℃				
存储温度(Storage temperature)		-40℃ up to +70℃				
存储相对湿度(Storage relative humidity)		≤70%				
焊接方式(Soldering recommend)	Wave soldering ,260℃ 8S Max					

■ 订购方式(How to order)

TLPHC	—	0		03	—	V	—	XXXX	—	XXP	—	X
Series No. 系列号		Pitch间距 0=3.50mm		Differentiate Number 区分号		Connection angle 角度 V=90° plug-in to board		Special code 特编号 XXXX=custom-made blank=standard		No. of Poles 极数 02-24P		Color 颜色 Green : G12

Web:www.tielee.com

TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 插头 (Female Connector) — single row



P/N : TLPS-003

Wiring orientation :

180°(wire to plug-in)

Rated : 160V,10A , 1.5mm²

Screw clamp unit: M2 , 0.22N·m