
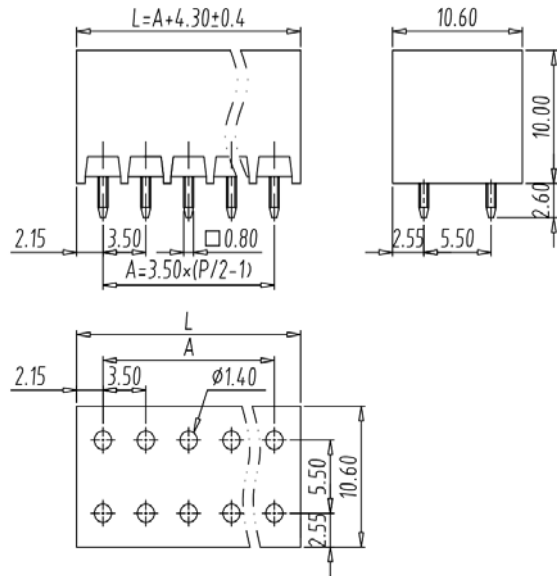


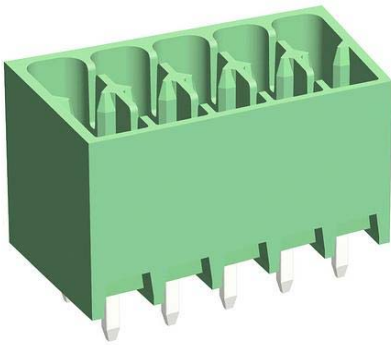

■ 图示(Pic. shown) : TLPHDC-010V-10P-G26

General.

PCB Connector Rated : 160V,10A
Single row ,3.50mm pitch , 04-48 Pole
Orientation:90°(plug-in to board)

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)		300V	50V	300V	160V	160V	320V
额定电流(Rated current)		8A	8A	8A	10A	10A	10A
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
绝缘材料组别(Material group)				IIla			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V			
额定冲击电压(Rated surge voltage)				2500V			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40°C up to +115°C(UL) / -40°C up to +120°C(IEC)			
存储温度(Storage temperature)				-40°C up to +70°C			
存储相对湿度(Storage relative humidity)				≤70%			
焊接方式(Soldering recommend)		Wave soldering ,260°C 8S Max					

■ 订购方式(How to order)

TLPHDC	0	10	V	XXXX	XXP	X
Series No. 系列号	Pitch间距 0=3.50mm	Differentiate Number 区分号	Connection angle 角度 V=90° plug-in to board	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 04-48P	Color 颜色 Green : G26

■ 插头 (Female Connector) -dual row in 1 plane



P/N : TLPD-010

Wiring orientation :

180°(wire to plug-in)

Rated : 160V,10A , 1.5mm²