




■ 图示(Pic. shown) : TLPHW-104-06P-G17


General. PCB Connector Rated : 320V,10A
Single row , 3.81mm pitch , 02-24 Pole
Orientation: 45°(plug-in to board)

认证 (Approval) :

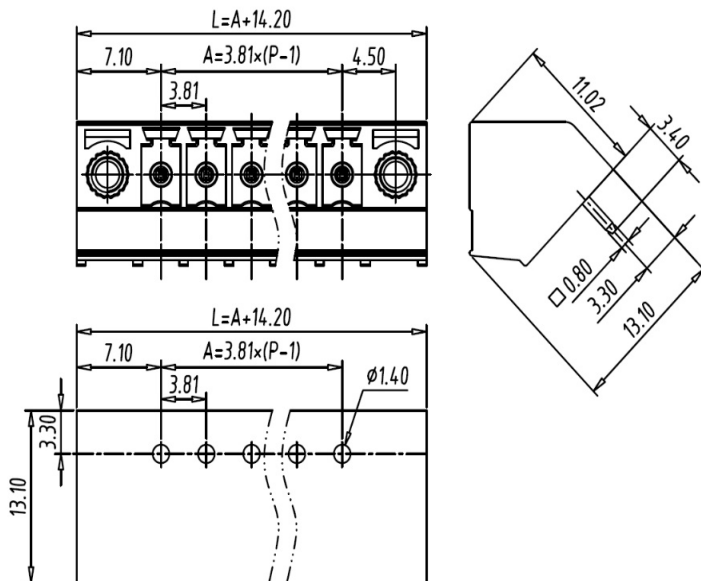

■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)							
		B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)		300V	--	300V	250V	320V	400V
额定电流(Rated current)		10A	--	10A	10A	10A	10A
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PBT UL94 V-0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V			
额定冲击电压(Rated surge voltage)				4000V			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺母(Mounting Nut) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40℃ up to +115℃(UL)/-40℃ up to +120℃(IEC)			
焊接方式(Soldering recommend)		Wave soldering ,260℃ 5S Max (Single Wave) , 260℃ 10S Max(Double Wave)					

■ 订购方式(How to order)

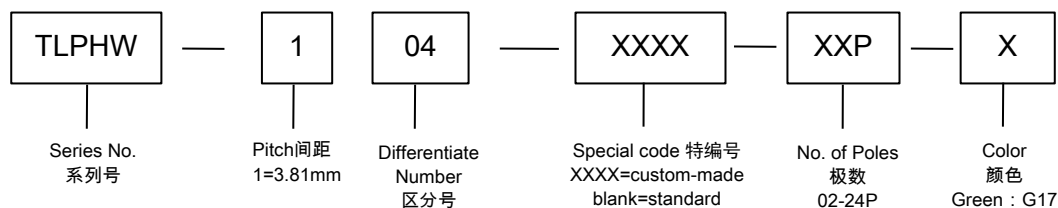

编码片 Coding key



P/N:
TLPCK-001-S

插头 (Female Connector) — single row



P/N : TLPSW-100V
Wiring orientation :
180°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPSW-100R
Wiring orientation :
90°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPSW-100RL
Wiring orientation :
270°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPSW-101V
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Spring clamp unit.



P/N : TLPSW-111
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPSW-007
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Spring clamp unit.