

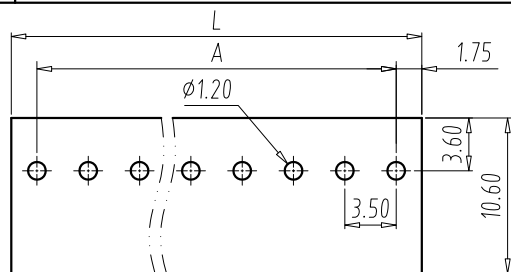
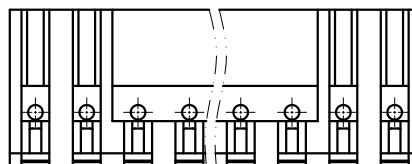
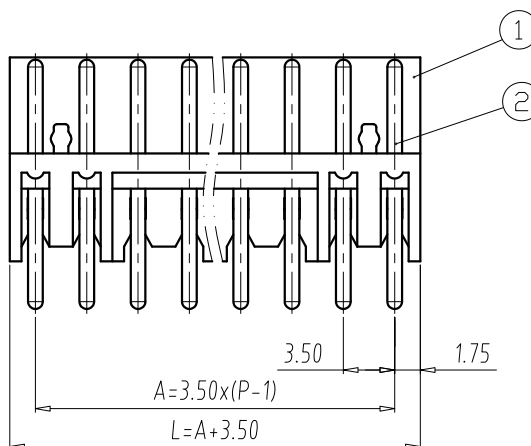


FILE: TL/007/TL007P-XXP-X

REV	E.C.N NO.	CONTENT	CHK	DATE
V2.0	S2206007	Pin change to round head	CFJ	2022.06.08

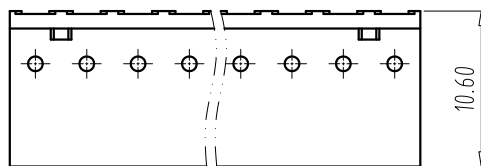


PCB LAYOUT
S=2:1



NOTES:

- UL:
Rating:300V, 10A;
Insulation Withstands Voltage:AC1600V/MIN;
- IEC:
Insulation Resistance:500MΩ or more at DC500V;
Contact Resistance: ≤5mΩ
- Using Temperature Range:-40℃~+120℃;
- RoHS compliance;

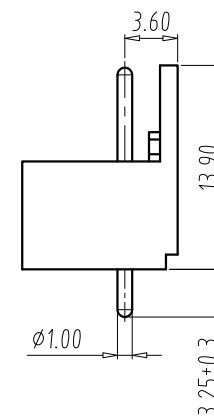

DIM	P	2	3	4	5	6	7	8	9	10	11	12							
		L	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42						
DIM	P	A	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5						
		L	13	14	15	16	17	18	19	20	21	22	23	24					
DIM	P	L	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84					
		A	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5					
Total Pitch Tolerances													Nominal dimension range						
in mm													in mm						
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650	700		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650	700	750		
±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20		

2	SOLDER PIN	P	Copper Alloy	Tin Plated	
1	HOUSING	1	PA66	UL94 V-0	
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE	
DATE	2022.01.15	UNITS	MM	SHEET/OF	1/1
DATE		SCALE	2 : 1	A4	
DATE		NAME	TL007P-XXP-X		
TIANLI		DWGNO.	TLDW-TL007PXXPX		
MACHINERY(NINGBO)CO.,LTD.					