

FILE: TL\205\TL205T-XXP-XC

NOTES:

1. UL:

Rating:300V,10A;

Insulation Withstands Voltage:AC2000V/MIN;

Suitable Electric Wire:22AWG~14AWG

Using Temperature Range:-40℃~+105℃

2. IEC:

Rating:630V,11A;

Rate Impulse Voltage:4000V;

Insulation Resistance:500MΩ or more at DC500V;

Contact Resistance: ≤5mΩ

Material Group: I ;

Pollution Degree:2;

Overvoltage Category: II ;

Suitable Electric Wire:0.2mm²~1.5mm², 2.5mm² Sol

Using Temperature Range:-40℃~+115℃






3. Screw Torque Value:0.4N·m

4. Strip length:5.0~6.0mm

5. Mating with Pin:Φ1.3mm

6. RoHS compliance;

REV	E.C.N NO.	CONTENT	CHK	DATE
V2.0	S2404006	Add VDE mark	YJ	2024.04.30

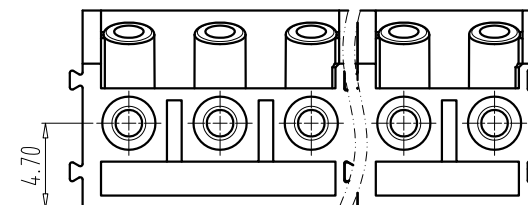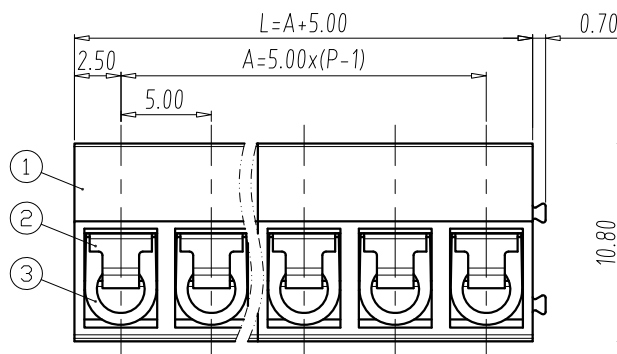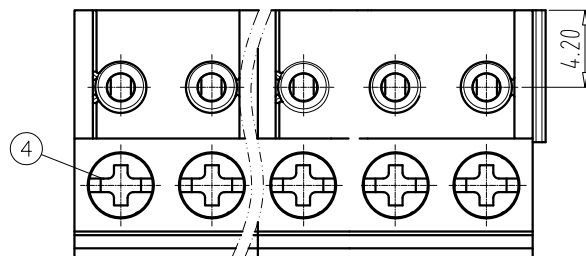

DIM	P	2	3	4	5	6	7	8	9	10	11	12
	L	10	15	20	25	30	35	40	45	50	55	60
	A	5	10	15	20	25	30	35	40	45	50	55
DIM	P	13	14	15	16	17	18	19	20	21	22	23
	L	65	70	75	80	85	90	95	100	105	110	115
	A	60	65	70	75	80	85	90	95	100	105	110

Total Pitch Tolerances in mm										Nominal dimension range in mm									
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 350	over 400	over 450	over 500	over 550	over 600	over 650	over 700	over 750	over 800
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 350	to 400	to 450	to 500	to 550	to 600	to 650	to 700	to 750	to 800	to 850
±0.20	±0.25	±0.30	±0.35	±0.40	±0.45	±0.50	±0.55	±0.60	±0.65	±0.70	±0.75	±0.80	±0.85	±0.90	±0.95	±1.00	±1.05	±1.10	±1.15

4	SCREW	P	STEEL	M2.5\Zn Plated
3	BLOCK	P	Copper Alloy	Ni Plated
2	SPRING	P	Copper Alloy	Tin Plated
1	HOUSING	1	PA66	UL94 V-0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	YHZ	DATE	2022.01.03	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2.5 : 1	A4	
APP.		DATE		NAME TL205T-XXP-XC			
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.				DWGNO.	TLDW-TL205TXXPXC		