

FILE:

REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		Set the change LOGO	ZHT	2021.02.02

NOTES:

1. UL:

Rating:300V, 10A

Insulation Withstands Voltage:AC1600V/MIN

Suitable Electric Wire:24AWG~14AWG

2. IEC:

Rating:320V, 12A

Rate Impulse Voltage:4000V

Insulation Resistance:500M Ω or more at DC500VContact Resistance: $\leq 5m\Omega$

Material Group: I

Pollution Degree:2

Overvoltage Category:III





Suitable Electric Wire:0.34mm²~2.5mm²

3. Using Temperature Range:-40℃~+105℃

4. Screw Torque Value:0.5N·m

5. Strip length:6.0~7.0mm

6. RoHS compliance

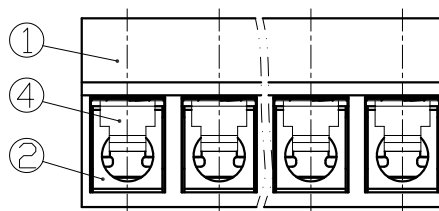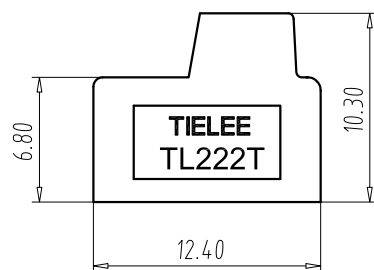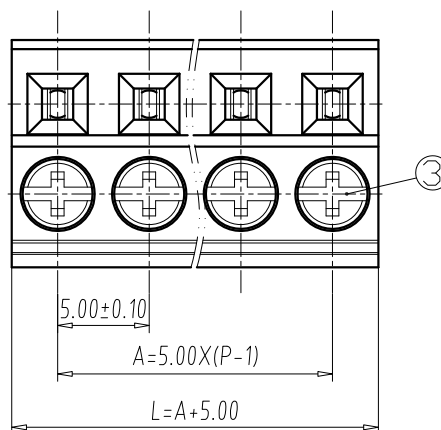

DIM	P	2	3	4	5	6	7	8	9	10	11	12							
		L	10	15	20	25	30	35	40	45	50	55	60						
A		5	10	15	20	25	30	35	40	45	50	55							
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24						
		L	65	70	75	80	85	90	95	100	105	110	115	120					
A		60	65	70	75	80	85	90	95	100	105	110	115						
Total Pitch Tolerances in mm										Nominal dimension range in mm									
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 320 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320		
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20		