


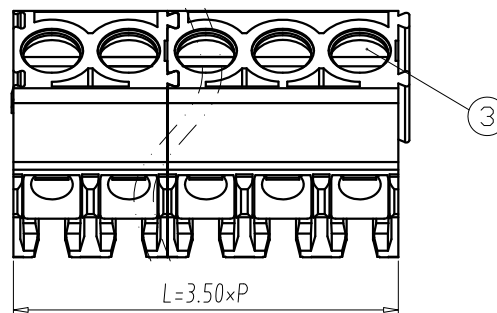


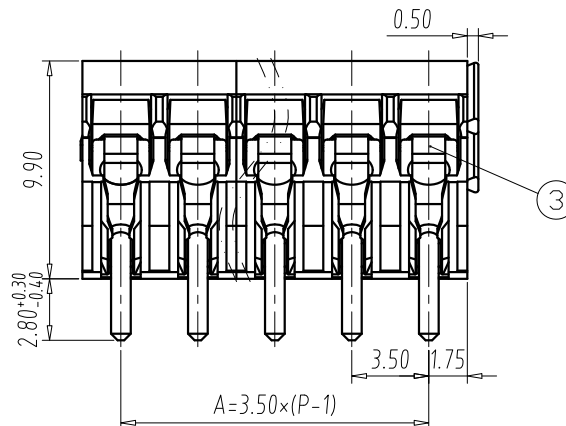

PCB LAYOUT
S=3:1

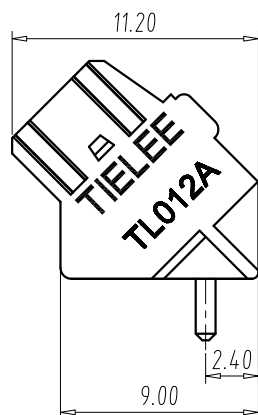

6. RoHS compliance;

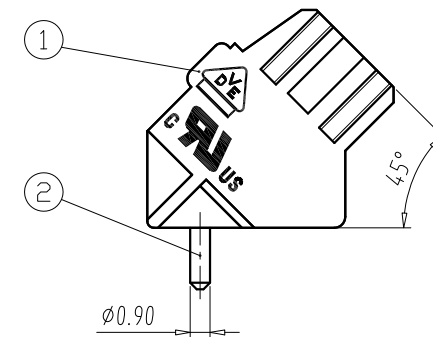

DIM	P	13	14	15	16	17	18	19	20	21	22	23	24
	L	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84
	A	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5

A	Total Pitch Tolerances in mm								Nominal dimension range in mm								
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	
	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90

4	SCREW	P	STEEL	M2/Zn Plated
3	SPRING	P	STAINLESS	/
2	SOLDER PIN	P	COPPER ALLOY	Tin Plated
1	HOUSING	1	PA66	UL94V-0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	SK	DATE	2021.12.22	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	4 : 1	A4	
APP.		DATE		NAME	TL012A0-XXP-XS		
 TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.				DWGNO.	TLDW-TL012A0XXPPXS		

