

FILE: TLPX107\TLP SW-107-XXP-X

REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	YHZ	2022.07.07

NOTES:

1. UL:

Rating:300V, 8A;

Insulation Withstands Voltage:AC1600V/MIN;

Suitable Electric Wire:28AWG~16AWG

2. IEC:

Rating:320V, 10A;

Rate Impulse Voltage:2500V;

Insulation Resistance:500M Ω or more at DC500V;Contact Resistance: $\leq 5m\Omega$

Material Group: I;

Pollution Degree:2;


Overvoltage Category: II;

Suitable Electric Wire:0.2mm²~1.5mm²



3. Using Temperature Range:-40℃~+115℃

4. Strip length:9.5~10.5mm

5. RoHS compliance;

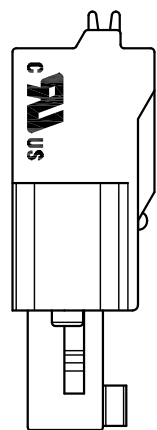

2P-7P 有凸台 (With rising point)
8P-24P 无凸台 (No rising point)

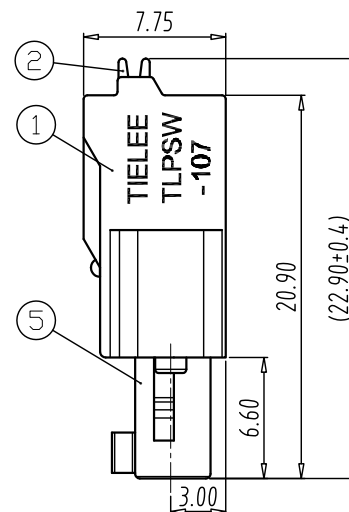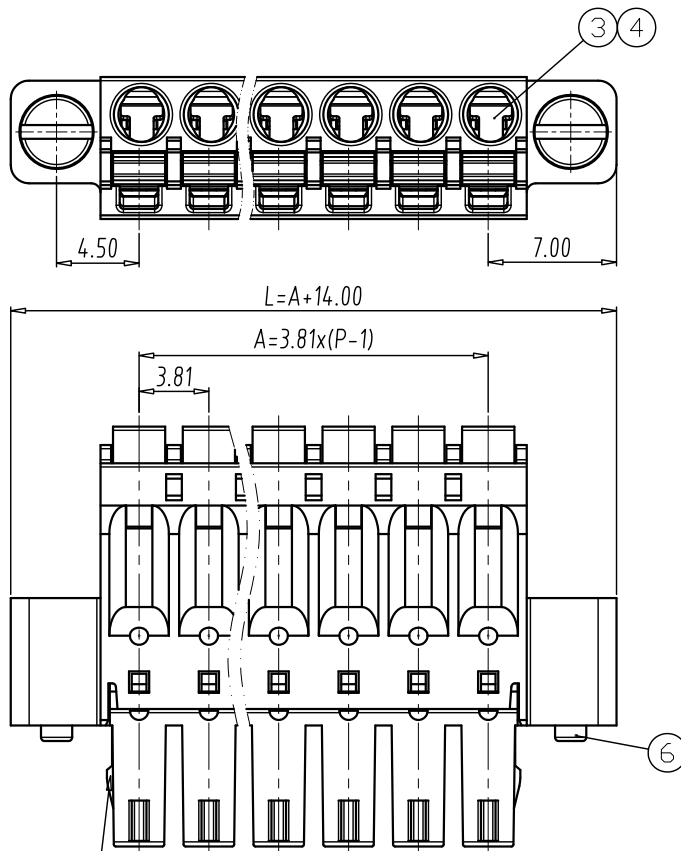

DIM	P	2	3	4	5	6	7	8	9	10	11	12					
	A	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.1	41.91					
	L	17.81	21.62	25.43	29.24	33.05	36.86	40.67	44.48	48.29	52.1	55.91					
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24				
	A	45.72	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.2	80.01	83.82	87.63				
	L	59.72	63.53	67.34	71.15	74.96	78.77	82.58	86.39	90.2	94.01	97.82	101.63				
Total Pitch Tolerances in mm							Nominal dimension range in mm										
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20

6	SCREW	2	STEEL	M2.5/Zn Plated
5	COVER	1	PA66	UL94 V-0
4	SPRING	P	Stainless	/
3	CLAMP	P	Copper Alloy	Tin Plated
2	LEVER	P	POM	Orange
1	HOUSING	1	PA66	UL94 V-0

DWG.	hyt	DATE	2020.09.01	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2.5 : 1	A4	
APP.		DATE		NAME	TLPSW-107-XXP-X		
 TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.				DWGNO.	TLDW-TLPSW107XXPX		

TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.