
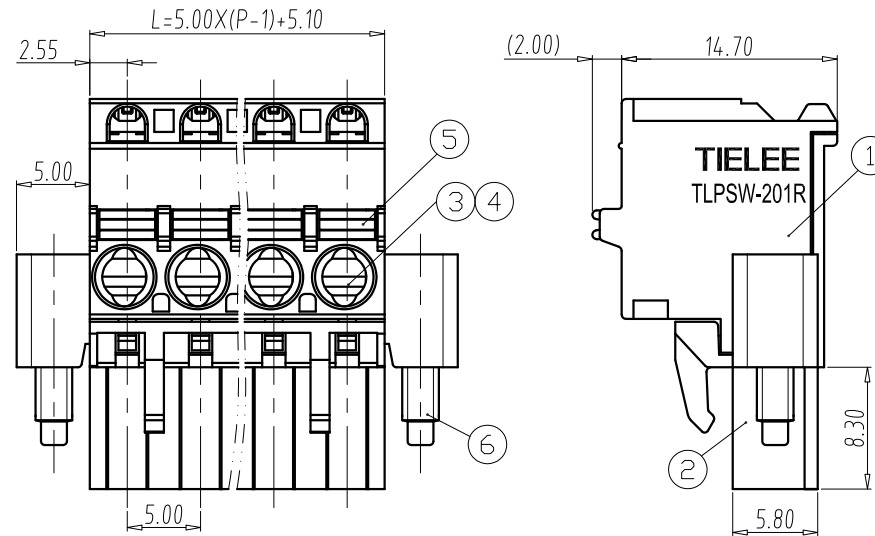


2P

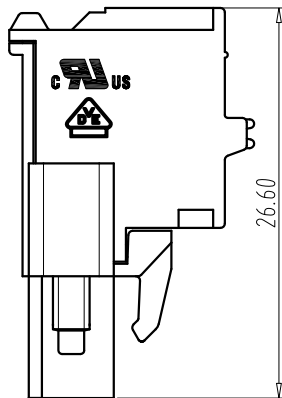

5. RoHS compliance;

DIM P	2	3	4	5	6	7	8	9	10	11	12	13					
L	10.10	15.10	20.10	25.10	30.10	35.10	40.10	45.10	50.10	55.10	60.10	65.10					
DIM P	14	15	16	17	18	19	20	21	22	23	24						
L	70.10	75.10	80.10	85.10	90.10	95.10	100.10	105.10	110.10	115.10	120.10						
Total Pitch Tolerances in mm							Nominal dimension range in mm										
over to 30	over to 30	over to 53	over to 70	over to 90	over to 115	over to 150	over to 200	over to 250	over to 300	over to 330	over to 360	over to 390	over to 420				
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20

6	SCREW	2	STEEL	M2.5/Zn Plated
5	LEVER	P	PBT	UL 94-V0
4	SPRING	P	STAINLESS STEEL	
3	CLAMP	P	COPPER ALLOY	TIN PLATED
2	COVER	1	PA66	UL 94-V0
1	HOUSING	1	PA66	UL 94-V0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	NJL	DATE	2020.08.28	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2 : 1	A4	
APP.		DATE		NAME	TLPSW-201R-XXP-X		
 TIANLI ELECTRICAL MACHINERY (NINGBO) CO. LTD.				DWGNO.	TL-02-TLPSW201RXXPX		