


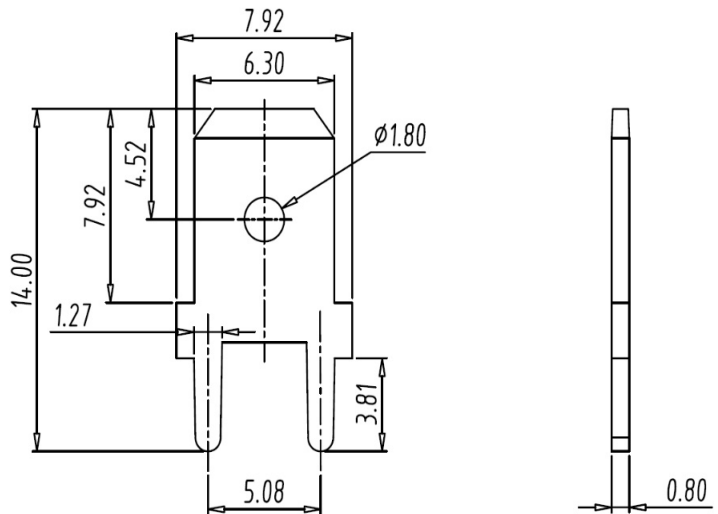

■ 图示(Pic. shown) : TQM002-6.3-A

通用产品 Apply product :

认证 (Approval) :

■ 电路图(Circuit diagram)

■ 尺寸(Dimensions)

间距(Width)

技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	--	--	--	--	--	--
额定电流(Rated current)	--	--	--	--	--	--
绝缘材料(Insulation Material)				--		
绝缘材料组别(Material group)				--		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper Alloy , Tin Plated		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				--		
额定冲击电压(Rated surge voltage)				--		
剥线长度(Wire stripping length)				--		
使用温度(Operating temperature)				--		
存储温度(Storage temperature)				-40°C up to +70°C		
存储相对湿度(Storage relative humidity)				≤70%		

■ 订购方式(How to order)

